

ANALYTIC SYSTEMS

Power Conversion Solutions

#207 12448 82nd Ave.
Surrey, BC V3W 3E9 CANADA

+1 (604) 543-7378 · phone
1-800-668-3884 · toll free
+1 (604) 543-7354 · fax

www.analyticsystems.com



Benefits

- Ultra-Quiet
- Power sensitive electronics without interference
- Rugged & Reliable
- Ensure years of safe and trouble free operation

Applications

- Marine Electronics Displays
- Mobile Offices (TV and Radio Vans)
- Automotive / RV
- Electric Utilities and Substations
- Base Station Power (Radio & Telecommunications)
- Industrial Controls (OEM Applications)
- Field Work / Construction Sites
- Solar / Alternative Power Systems
- Any 12 or 24V Equipment

DC/DC Converters

VTC605 Series Step-Up Converter

Description

Step up a 12 VDC battery to between 13.5 and 17.0 or 24.0 and 27.5 VDC in 0.5 VDC increments (via 3 position DIP switch), or stabilize a 12 or 24 VDC power system.


Safety features include reverse input protection, low input voltage alarm, low output voltage alarm, over temperature shutdown and alarm, a dry contact alarm relay output and output overvoltage crowbar. If the input voltage exceeds the regulated output voltage, the unit simply passes the voltage through with full LC filtering and a single schottky diode drop (0.5 VDC or less). Optional features include remote panel monitoring with On/Off control.

Applications include temporarily brightening 12 volt headlights or work lights, increasing voltage into an automotive or marine ignition system for hotter spark and/or prevention of failures due to voltage drop during engine start, stabilizing 12V and 24 VDC power systems in marine, automotive or aeronautical environments and more.

Features

- Vibration proof output voltage adjustment by 3 position DIP switch
- Audible & visual indicators for constant current, low input voltage, low output voltage & over-temperature
- Extremely rugged and well suited for marine and other demanding environments
- High tolerance for shock and vibration
- Ultra-quiet low EMI operation
- Current limiting protection
- Reverse input protection
- Output over-voltage crowbar
- Dry contact output fail relay
- Remote control option
- Wide-Temperature operation available
- Parallel output diodes available
- Conformal Coating and/or Harsh Environment Ruggedization Available
- 3 year parts and labour warranty

VTC605 Series Step-Up Voltage Converter

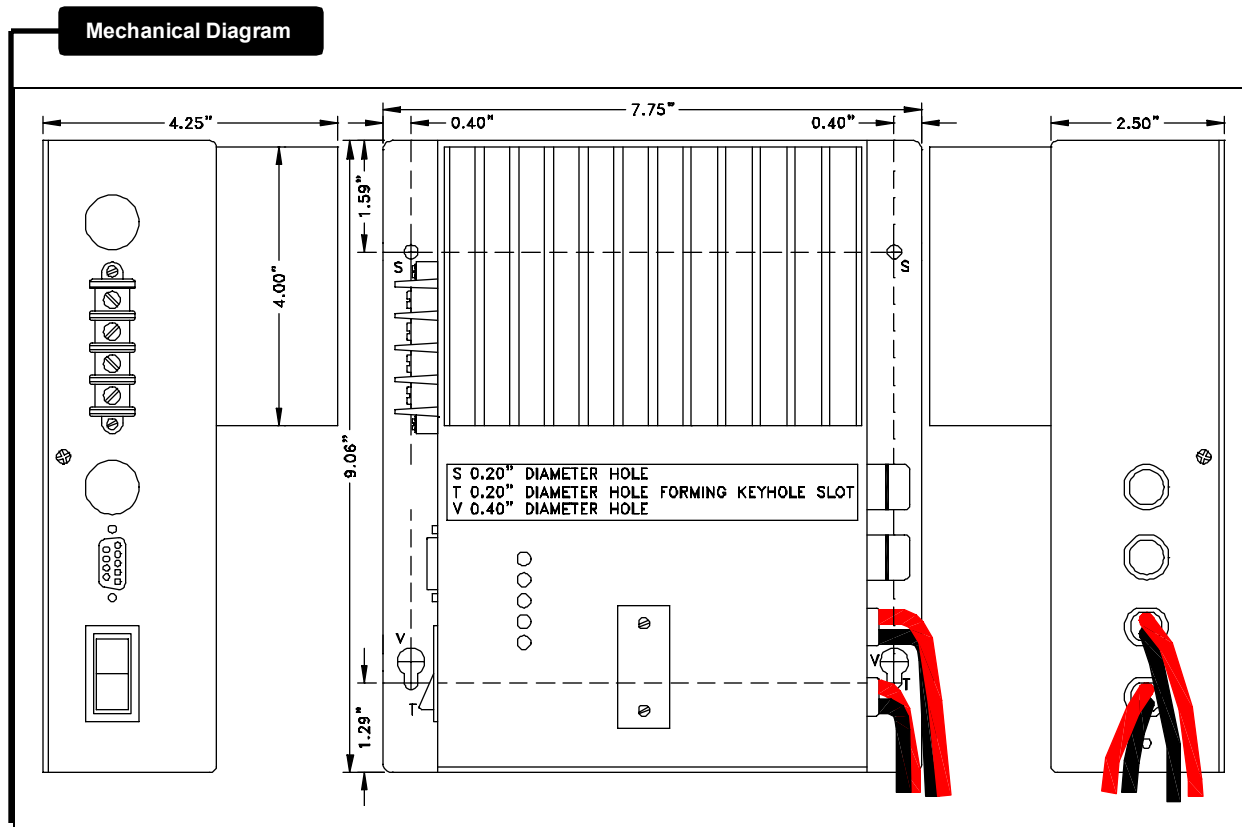

Specifications

Electrical (Input)

Input Volts (DC)	10.5-18	10.5-28
Input Amps (max)	50	
Input Fuse (AGC)	30 x 2 Amp	
Noise on Input	< 50 mV	
Low Input Voltage Alarm	10.5 VDC	
Current Limit	50 Amps in	

Environmental Specifications

Operating Temp. Range	-25° - +40°C @ maximum output Derate Linearly 2.5% per °C from 40°C (Optional -40°C extra wide temp. operation avail.)
Humidity	0 - 95°C Relative Humidity (non-condensing) with optional conformal coating
Audible Noise	NONE Ødb @ 3 ft
Typical Service Life	> 10 yrs. (87,600 hrs)
Isolation	Any Input or Output to Case 500 VDC Input to Output – Common Negative

Electrical (Output)

Output Nominal (op)	12	24
Output Volts (DC)	Input - 1V or 13.5 to 17.0 Whichever is greater	Input - 1V or 24.0 to 27.5 Whichever is greater
Output Amps	♦ 45	
Output Crowbar	Programmed Output Volts x 1.2	
Output Ripple & Noise	< 50 mV	
Low Output Voltage Alarm	Programmed Output Voltage minus 2.5 VDC	
Transient Response	< 1V for 50% Surge	
Regulation – Line/Load	< +/- 0.5%	
Duty Cycle	Continuous 100% for 24 hrs per day	
Efficiency	> 90% @ Maximum Output	

Mechanical Specifications

Length	9.1 in / 23.1 cm
Width	7.8 in / 19.8 cm
Height	4.3 in / 10.8 cm
Material	Marine Grade Aluminium
Finish	Black Anodize / Powder Epoxy Coat
Fastenings	All 18-8 Stainless Steel
Weight	6.0 lb / 2.7 kg
Connections	Four contact output terminals
Warranty	3 years

- ♦ The actual output current capability depends upon the input/output voltage ratio. To obtain the actual output current capability at any given input voltage, use the following formula:

$$\text{Output Amps} = \text{Input Volts} / \text{Output Volts} \times 45$$

For example, at 10.5 VDC in and 13.6 VDC out, the output current = $10.5 / 13.6 \times 45 = 34.7$ amps

Available From:



ANALYTIC SYSTEMS

Quality since 1976

#207 12448 82nd Ave.
Surrey, BC V3W 3E9 CANADA
+1 (604) 543-7378 • phone
1-800-668-3884 • toll free
+1-604-543-7354 • fax
www.analyticsystems.com