




CURTIS

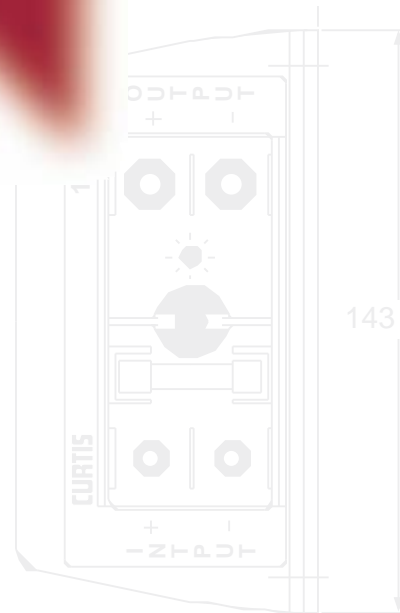

DC/DC CONVERTERS

1400 SERIES

CURTIS INSTRUMENTS, INC.
200 KISCO AVENUE
MT. KISCO, NY 10549
USA
TEL (914) 666-2971
FAX (914) 666-2188

CURTIS PMC
235 EAST AIRWAY BLVD.
LIVERMORE, CA 94550
USA
TEL (925) 961-1088
FAX (925) 961-1099

CURTIS INSTRUMENTS, (UK) LTD.
5 UPPER PRIORY STREET
NORTHAMPTON NN1 2PT, ENGLAND
TEL 44 (0) 1604-629755
FAX 44 (0) 1604-629876

**CURTIS INSTRUMENTS INDIA
PRIVATE LTD.**
DATTAPRASAD • AVANI APARTMENT
APT. NO. 7 • 1206 B/7 APTE ROAD,
SHIVAJI NAGAR • PUNE 411 004, INDIA
TEL 91 (0) 20-5531288
FAX 91 (0) 20-5539192

www.curtisinst.com



DESCRIPTION

The 1400 High Efficiency Series DC/DC Converter applies advanced technology and is configured specifically for electric vehicles. Available in 250W and 375W models, the devices provide a precise regulated output of 12.0 or 24.0 volts for computer terminals and communication equipment. Provides 13.5 or 28.0 volts for driving lamps and charging auxiliary batteries.

WARRANTY

Two Year Limited Warranty
(see terms of sale for specifics)

Application

Designed to provide a reduced voltage supply to power auxiliary electrical systems, the Curtis 1400 Series High Efficiency DC/DC Converters achieve unmatched levels of efficiency and safety.

Features

- Maximum pulse power exceeds 125% of the nominal rating.
- Simple to install, compact and versatile - can be mounted in any position.
- Safe to use, di-electrically isolated output, thermal protection, transient protection, reverse polarity protection.
- Provides power to auxiliary electrical circuits on an electrical vehicle without recourse to battery tapping which is unsafe, damaging to the battery and may contravene EC regulations.
- Regulated outputs preclude lights from dimming and other effects of voltage drop caused by battery loading.
- Input and output are di-electrically isolated for maximum safety.
- Over 85% efficient with high power density.
- The output is regulated to +/- 1.5%. Model 1400 Series is superior to previously available converters and prevents battery damage and unsafe installations caused by battery tappings.
- Due to superior efficiency less heat is generated which, together with transient protection, leads to improved reliability.
- Smaller, lighter and significantly more quiet than conventional converters.

Options Available

- Available in both 250 Watt peak and 375 Watt peak models.
- Range of models to cover 24 to 144 volt input with 12.0, 13.5, 24.0 or 28.0 volt output.

Specifications

	1400 E	1410 E
Maximum Peak Power	375W	250W
Nominal Power Rating	300W	200W
Isolated	Yes	Yes
Frequency	60KHz	60KHz
Input Voltages available	24/36; 48/60; 72/96; 120/140	36/48; 72/96
Output Voltage	12V; 13.5V; 24V; 28V	12V; 13.5V; 24V; 28V
Current Limit @ 12V	30A	20A
Nominal Current Output (1 hr. rating)	25A	15A
Current Limit @ 24V	15A	10A
Nominal Current Output (1 hr. rating)	12.5A	7.5A
Output Voltage Regulation	+/- 1.5%	+/- 1.5%
Output voltage ripple	<1%	<2.5%
Input voltage	65% to 115% of nominal	65% to 115% of nominal
Output short circuit protection	Yes	Yes
Input Reverse polarity protection	Yes	Yes
Efficiency	>85%	>85%
Weight	1.6 kg (3.52 lb)	2.1 kg (4.6 lb)
Size	176mm x 143mm x 74mm	176mm x 143mm x 74mm
Input/Output	Di-electrically isolated conforms to EEC 86/663 and UL 583 Standards	
Input Transient Protection	+/- 500V at 500Hz	+/- 500V at 500Hz
Di-electric Isolation	1000 volts, at 60Hz sinusoidal for 1 minute	
Thermal Protection	Thermal switch cuts off at +80°C and resets at +60°C (internal temperature)	
Ambient Operating Temp. Range	-30°C to +55°C	-30°C to +55°C
Storage Temp. Range	-40° to +100°C	-40° to +100°C
Environment Protection	Case: IP65 (terminations IP20)	Case: IP65
Shock and Vibration	SAE J1378, March 1983	
EMC Specifications	EN50081-1 for emission / EN50082-2 for immunity	

Model Encodement

1400E/1410E - vvvv - model suffix
 Model # input voltage

Available Models

Model	1400E		1410E	
	OUTPUT VOLTAGE	OUTPUT CURRENT LIMIT	OUTPUT VOLTAGE	OUTPUT CURRENT LIMIT
1201	13.5VDC	28.0A	13.5VDC	14.3A
1203	12.0VDC	28.0A	12.0VDC	16.7A
1211	13.5VDC	22.0A	-	-
1212	14.0VDC	22.0A	-	-
2401	28.0VDC	10.7A	28.0VDC	7.1A
2403	24.0VDC	10.7A	24.0VDC	8.4A

Dimensions - mm (inches)

